





BUILDPRO® MAX TABLES

MAXIMUM TABLE SURFACE, MAXIMUM CAPACITY

Set-up heavy duty, large, or complex fixtures.



Set-up more than one fixture at a time on the larger surface.

Utilize the additional holes (33% more than slotted tables) for clamping at multiple points.

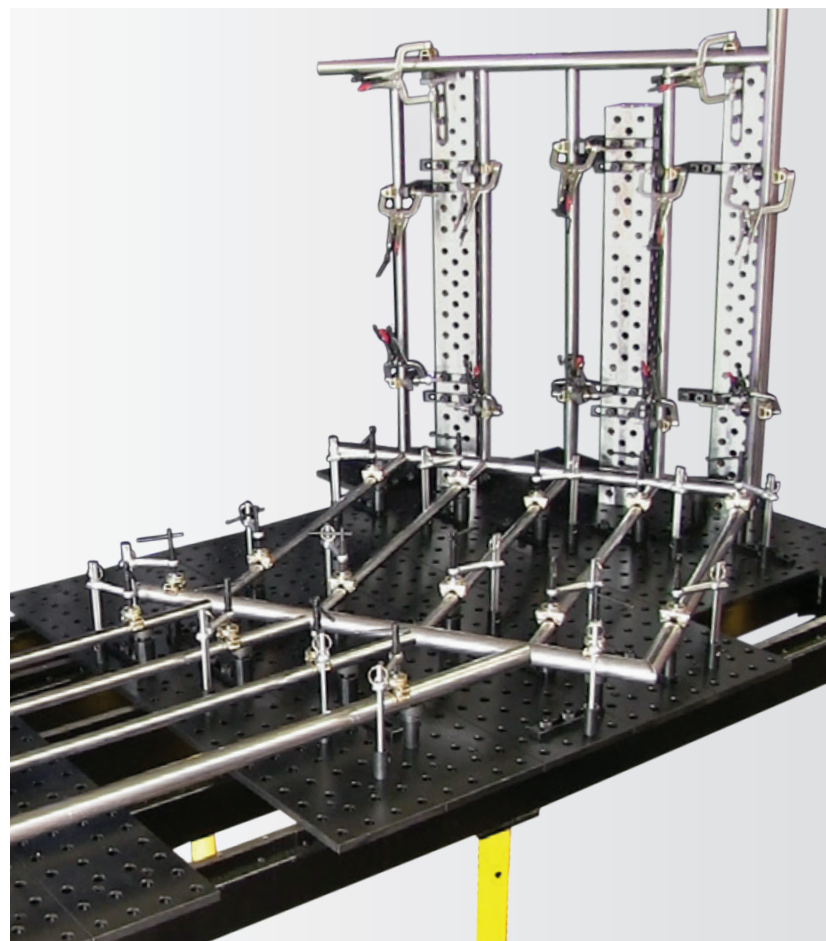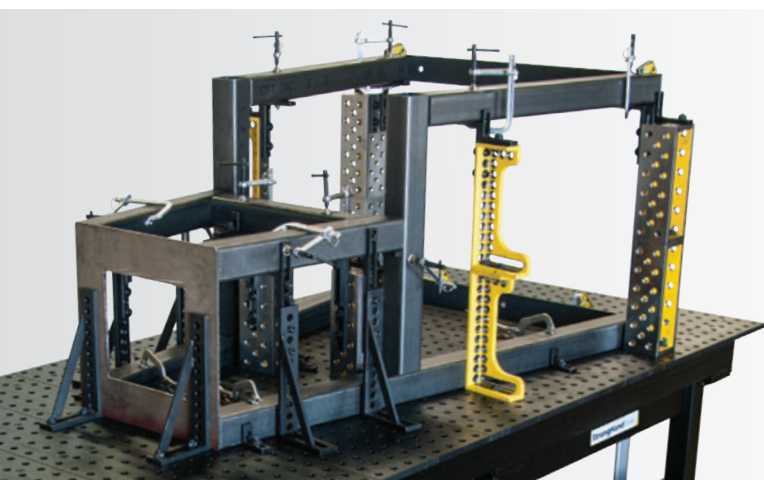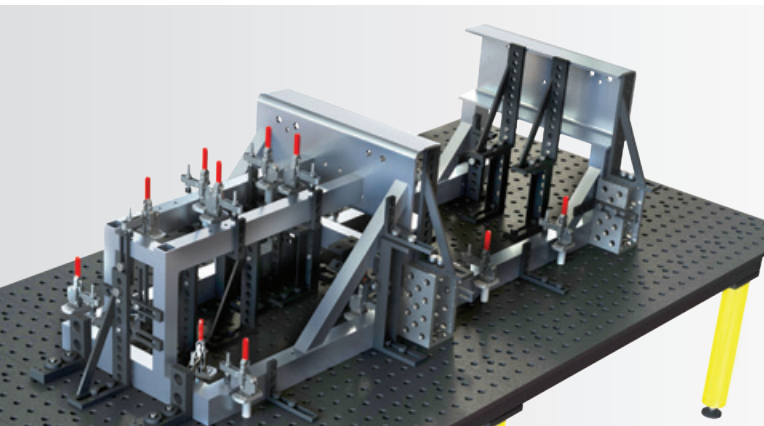

2,550 X 1,250 MM

TABLE SURFACE DIMENSION



Optional Leg Brace Assy.

With Heavy Duty Leg

Part No.	Finish	Leg + Leveling Pad Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMD625125V	Standard	767	927	680 per leg	655
TME625125V		617	777		650
TMQD625125V	Nitrided	767	927		655
TMQE625125V		617	777		650

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB2630	76 mm Dia. Heavy Duty Legs	11.8

With Adjustable Round Leg - Adjustable at 25 mm increments

Part No.	Finish	Leg + Leveling Pad Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMR625125V	Standard	565 ~ 819	725 ~ 979	680 per leg	660
TMQR625125V	Nitrided				

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB2630	76 mm Dia. Adjustable Legs	11.8

With Adjustable Round Leg & Mobility Caster



Part No.	Finish	Leg + Caster Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMRC625125V	Standard	685 ~ 940	845 ~ 1,100	300 per leg	675
TMQRC625125V	Nitrided				

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB2630	76 mm Dia. Adjustable Legs	11.8

*All load capacities are calculated based on static load.

1,950 X 1,250 MM

TABLE SURFACE DIMENSION



Optional Leg Brace Assy.

With Heavy Duty Leg

Part No.	Finish	Leg + Leveling Pad Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMD620125V	Standard	767	927	680 per leg	490
TME620125V		617	777		485
TMQD620125V	Nitrided	767	927		490
TMQE620125V		617	777		485

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB2030	76 mm Dia. Heavy Duty Legs	10.8

With Adjustable Round Leg - Adjustable at 25 mm increments

Part No.	Finish	Leg + Leveling Pad Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMR620125V	Standard	565 ~ 819	725 ~ 979	680 per leg	495
TMQR620125V	Nitrided				

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB2030	76 mm Dia. Adjustable Legs	10.8

With Adjustable Round Leg & Mobility Caster

Part No.	Finish	Leg + Caster Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMRC620125V	Standard	685 ~ 940	845 ~ 1,100	300 per leg	515
TMQRC620125V	Nitrided				




Part No.	Leg Brace Assembly for	Weight (kg)
TMLB2030	76 mm Dia. Adjustable Legs	10.8

*All load capacities are calculated based on static load.



1,200 X 1,200 MM

TABLE SURFACE DIMENSION



Optional Leg Brace Assy.

With Heavy Duty Leg

Part No.	Finish	Leg + Leveling Pad Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMD61212V	Standard	767	927	680 per leg	435
TME61212V		617	777		430
TMQD61212V	Nitrided	767	927		435
TMQE61212V		617	777		430

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB1203	76 mm Dia. Heavy Duty Legs	6.8

With Adjustable Round Leg - Adjustable at 25 mm increments

Part No.	Finish	Leg + Leveling Pad Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMR61212V	Standard	565 ~ 819	725 ~ 979	680 per leg	440
TMQR61212V	Nitrided				

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB1203	76 mm Dia. Adjustable Legs	6.8

With Adjustable Round Leg & Mobility Caster

Part No.	Finish	Leg + Caster Height (mm)	Table Surface Height (mm)	* Capacity (kg)	Table Weight (kg)
TMRC61212V	Standard	685 ~ 940	845 ~ 1,100	300 per leg	450
TMQRC61212V	Nitrided				

Part No.	Leg Brace Assembly for	Weight (kg)
TMLB1203	76 mm Dia. Adjustable Legs	6.8

*All load capacities are calculated based on static load.